

UNIT FOR CROWD ACCESS CONTROL

MS 200

FLOW : 1500

People per hour

DIMENSIONS WHEN CLOSED

Length	2991 mm
Width	2435 mm
Height	2920 mm

DIMENSIONS WHEN OPENED

Length with ramps	6750 mm
Width	2991 mm
Height	2920 mm

ESTIMATED MASS OF THE UNIT

1800 kg (approx.)

EQUIPMENT

- 2 Walk-through metal detectors

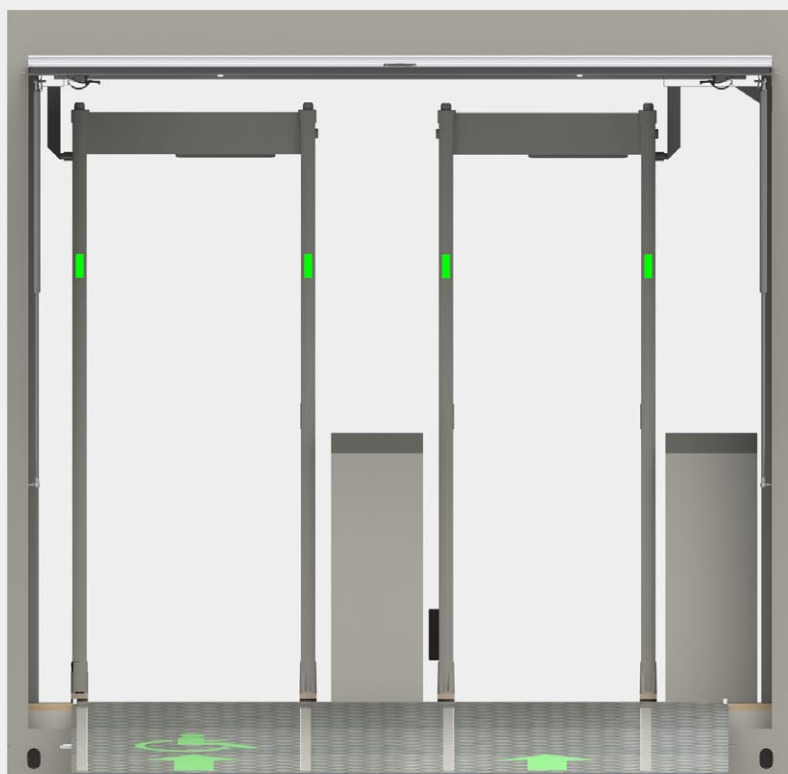


Fig.1 3D illustration - View from the input side of the deployed module

All rights reserved - Patented product no. 1756837 and no. 1915780
Registered trademark on behalf of BEHM

MODULAR 10 FEET

- Electromagnetic shielding provided by unique frame design
- Composite panel used to avoid interference with control equipment
- 2 sleeves per side and 4 lifting rings on the roof for handling by forklift or hydraulic crane.
- 4 ISO maritime container type corners (conforms to 10ft position)
- Non-slip floor covering
- Easily washable. High usage resistance

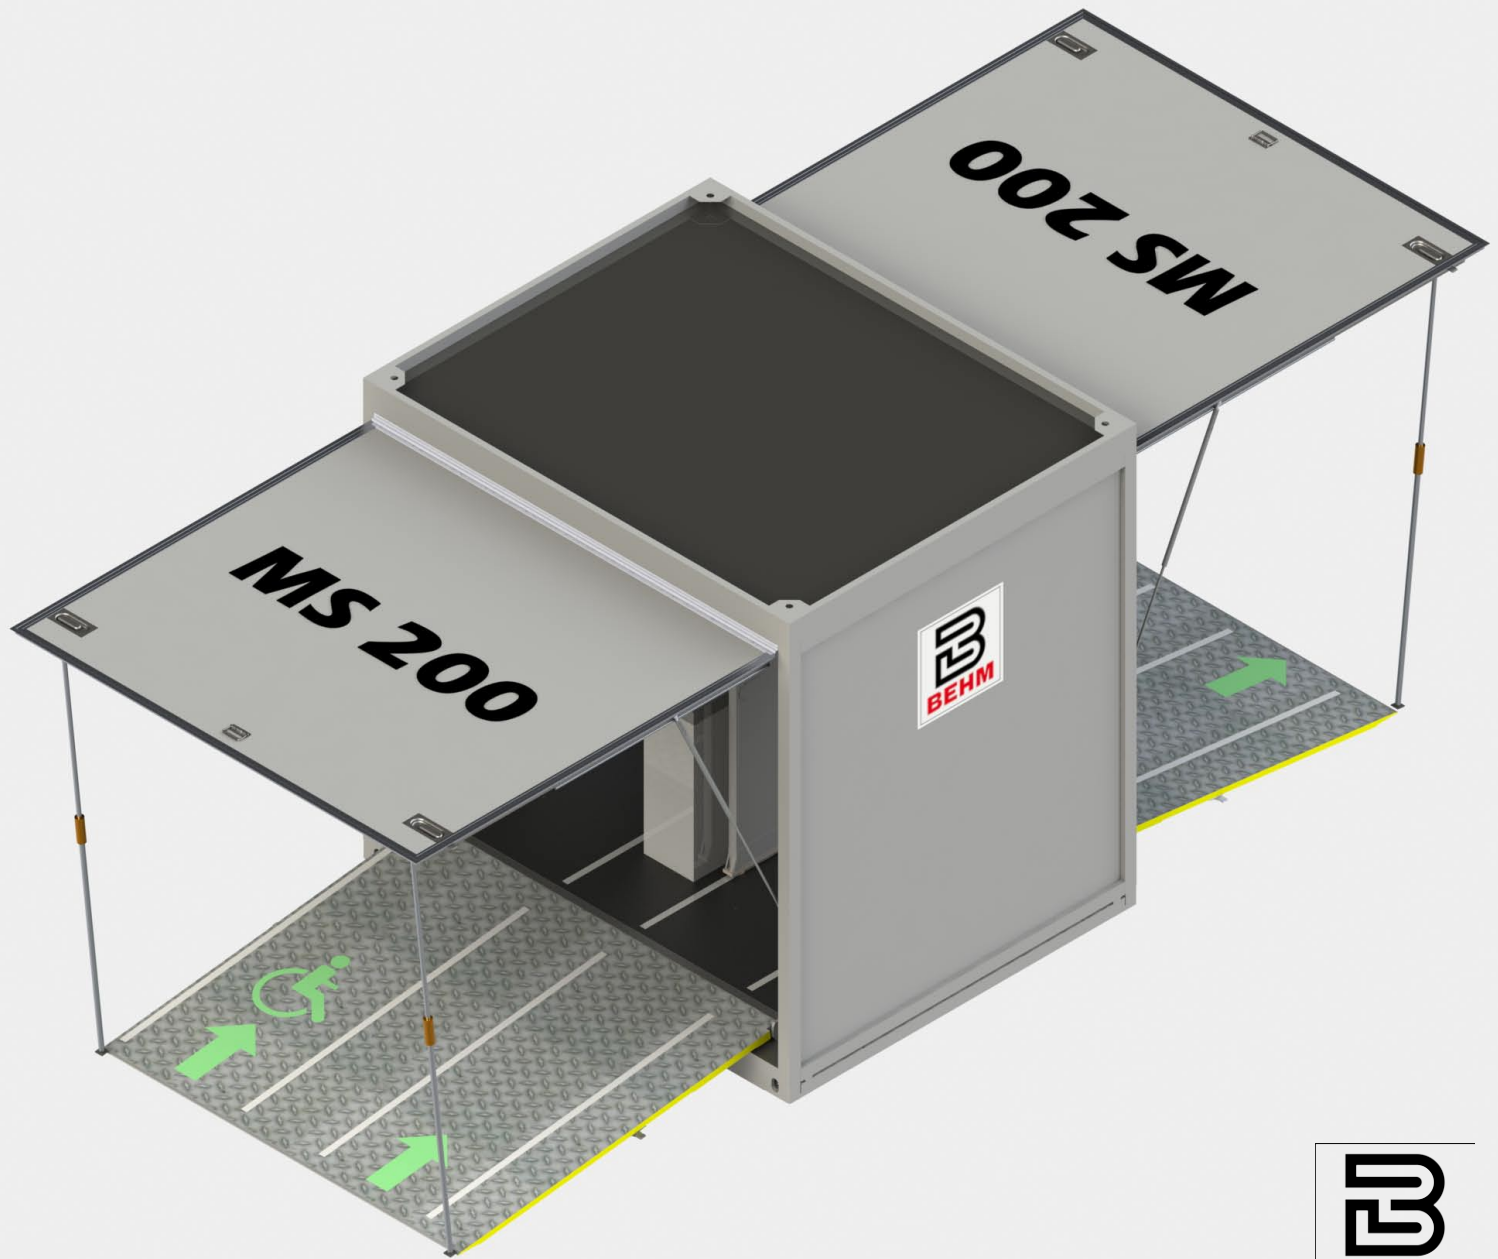


Fig.2 3D illustration - Isometric view of deployed module



CONTROL PERSON

- 2 latest generation multi-zone walk-through metal, one of which 800 mm wide and complies with People Reduced mobility access regulations.

MARKINGS

- Safety markings on all edges
- High visibility floor markings

EXTENSIONS

- 2 side panels mounted on continuous waterproof hinges
- The opening of each panel is assisted by 2 gas struts.
- 2 pivoting aluminium ramps, depth 2200 mm for people with reduced mobility
- Mechanical spring assisted opening.

POWER SUPPLY

- Electric box with 30 mA differential protection
- 1 thermal circuit breaker per circuit
- 16 A waterproof socket power supply
- 1 x 15 m extension cord with adapter
- Voltage presence indicator



Fig.5 3D illustration - View of the exit

LIGHTING

- 6 LED strips



Fig.4 3D illustration - Top view of deployed module



Fig.5 3D illustration - View of the exit side



Fig.6 3D illustration - Closed view

ACCESSOIRES

- 1 fire extinguisher with stand
- 2 pieces of furniture
- Specific plates and markings in accordance with the regulations in force
- Supply of 4 padlocks for locking the handles



Fig.7 Locking handle



MOBIL SECURITY GOT THE 'GRAND EVENEMENTS' LABEL (INCLUDING FOR PARIS 2024 OLYMPIC GAMES) BY THE 'SECURITY INDUSTRIES' 'STRATEGIC COMMITTEE



CONTACT
Email : societe@behm.fr
Telephone : +33(0)3 82 88 14 69

www.behm.fr



OPTIONS		
REFERENCE	DESCRIPTION	VISUALS
MS-AUT	Automatic opening with touch screen remote control panel	
MS-BAT	Inverter + battery backup for a minimum of 30 min of autonomous operation	
MS-DCO	Frame colour according to customer's choice (RAL code)	
MS-COV	Personalisation of the panels (photos, texts etc...)	
MS-VI1	Video surveillance package, 3 cameras inside, 2 outside, recorder, monitor	
MS-VI2	Telecopic mast for long distance video surveillance	
MS-PP1	Automatically deployable advertising panel on the roof with a surface area of 4 m²	
MS-CP1	3D stereoscopic sensor for bi-directional counting Real time remotely accessible information	
MS-BCH	2 side tarpaulins fixed under each panel	



CONTACT
Email : societe@behm.fr
Telephone : +33(0)3 82 88 14 69

www.behm.fr

